


# Power

## Cordex™ 3.1kW

Modular Switched Mode Rectifier

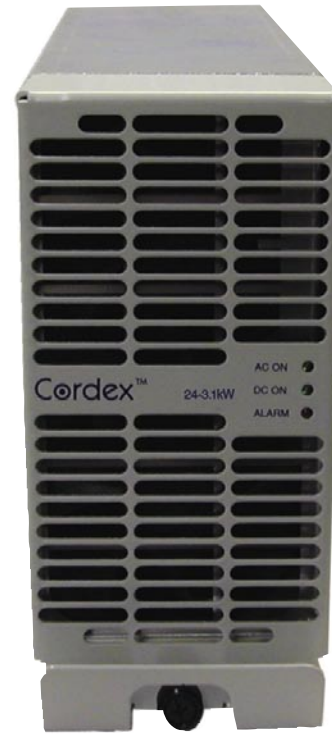

CXRF 24-3.1kW

- > Available in 130A @ 24VDC
- > 3.1kW constant power output
- > High power density, 18.6kW per 23" shelf
- > Power limiting and wide range AC input
- > High efficiency and power factor correction
- > Hot swappable, ultra compact design

**Cordex rectifiers bring advanced technology to the DC power industry.** Innovative engineering combines the best in efficiency and reliability meeting the power requirements for a variety of system applications.

The 24VDC Cordex 3.1kW rectifier has extremely high density providing the most power in the least amount of space. A compact 4RU shelf accommodates six rectifiers per 23" shelf and five rectifiers per 19" shelf.

Local and remote setup, adjustment, and control is a simple single-step process with the Cordex CXC System Controller. By utilizing TCP/IP technology, complete configuration and monitoring of power equipment is possible through a network web browser.

## Cordex 3.1kW Modular Switched Mode Rectifier

### Rectifier Module(s)

#### Electrical

Input voltage	
Nominal:	208 – 240VAC
Operating:	176 – 312VAC
Extended:	90 – 176VAC (derated output power)
Input frequency:	45 – 70Hz
Power:	3100W continuous/module
Power factor:	>0.99 (50 – 100% load)
THD:	<5%
Efficiency:	>90%
Output voltage:	21 – 29VDC
Output current:	115A @ 27VDC (130A max. 24V)
Regulation:	-0.2% ±25mV, line and load at 0% slope (static)
Transient response:	±1% for 10 – 100% load step, 2ms recovery time
Noise	
Voice band:	<32dBnC
Wide band:	<10mV RMS (10kHz – 10MHz) <100mV pk to pk (10kHz – 100MHz)
Psophometric:	<1.0mV
Acoustic:	<60dBa @ 1m (3ft)

#### Mechanical

Dimensions	
mm:	160H x 87W x 300D
inches:	6.3H x 3.4W x 11.8D
Weight:	4.6kg (10lb)

#### Features

Indicators:	AC mains OK - green LED Module OK - green LED Module fail - red LED
Controls:	CAN interface to CXC Controller
Adjustments: (via CXC Controller)	Float voltage Equalize voltage High voltage alarm Low voltage alarm High voltage shutdown Current limit Slope Start delay
Protection:	Current limit/short circuit Start delay Input/output fuses Output high voltage shutdown Power limiting Thermal foldback/shutdown Input transient AC low line foldback shutdown



23" Cordex 3.1kW Shelf

### Environmental

Temperature	
Standard:	-40 – 65°C (-40 – 149°F)
Extended:	-40 – 75°C (-40 – 167°F)
Storage:	-40 – 85°C (-40 – 185°F)
Humidity:	0 – 95% RH non-condensing
Elevation:	-500 – 4000m (-1640 – 13120ft)
Heat dissipation:	<1060BTU per hour

### Shelves

#### Mechanical

##### 19"/23" shelf (5 modules):

Dimensions	
mm:	177H x 442W x 389D
inches:	6.9H x 17.4W x 15.3D
Weight:	8.5kg (19lb)
Mounting:	Fits 19" rack flush/center mount Fits 23" rack center mount only

##### 23" shelf (6 modules):

Dimensions	
mm:	177H x 530W x 389D
inches:	6.9H x 20.8W x 15.3D
Weight:	9.5kg (21lb)
Mounting:	Fits 23" racks only flush/center mount

#### Connections

Input:	Box type terminal block 6 – 16mm <sup>2</sup> (10 – 6AWG)
Output:	Bus adapters with 3/8" studs on 1" centers
Chassis ground:	Compression lug 6 – 16mm <sup>2</sup> (10 – 6AWG)
CAN communication:	RJ 12 offset

### Standards

The Cordex 3.1kW is designed to meet the following:

Safety:	CSA C22.2 No 60950-1-03 UL 60950-1 1 <sup>st</sup> Edition IEC/EN 60950-1
EMC:	ETSI 300 386 CFR47 (FCC) Part 15 Class B ICES-03 Class B EN55022 (CISPR 22) Class B C-tick (Australia) EN 61000-3-2 EN 61000-3-3 EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6 EN 61000-4-11 ANSI/IEEE C62.41 Cat B3 CE marked
Immunity:	

For more information visit [www.argusdcpower.com](http://www.argusdcpower.com)

Argus Technologies Canada Burnaby, British Columbia Tel: 604 436 5900 Fax: 604 436 1233  
United States Bellingham, Washington Tel: 360 647 2360 Fax: 360 671 4936

#048-641-10 (09/2004)

Argus Technologies reserves the right to make changes to the products and information contained in this document without notice.  
Copyright © 2004 Argus Technologies. All Rights Reserved. Argus® is a registered trademark of Argus Technologies. member of The Alpha Group™ is a trademark of Alpha Technologies.  
Cordex™ is a trademark of Argus Technologies.